

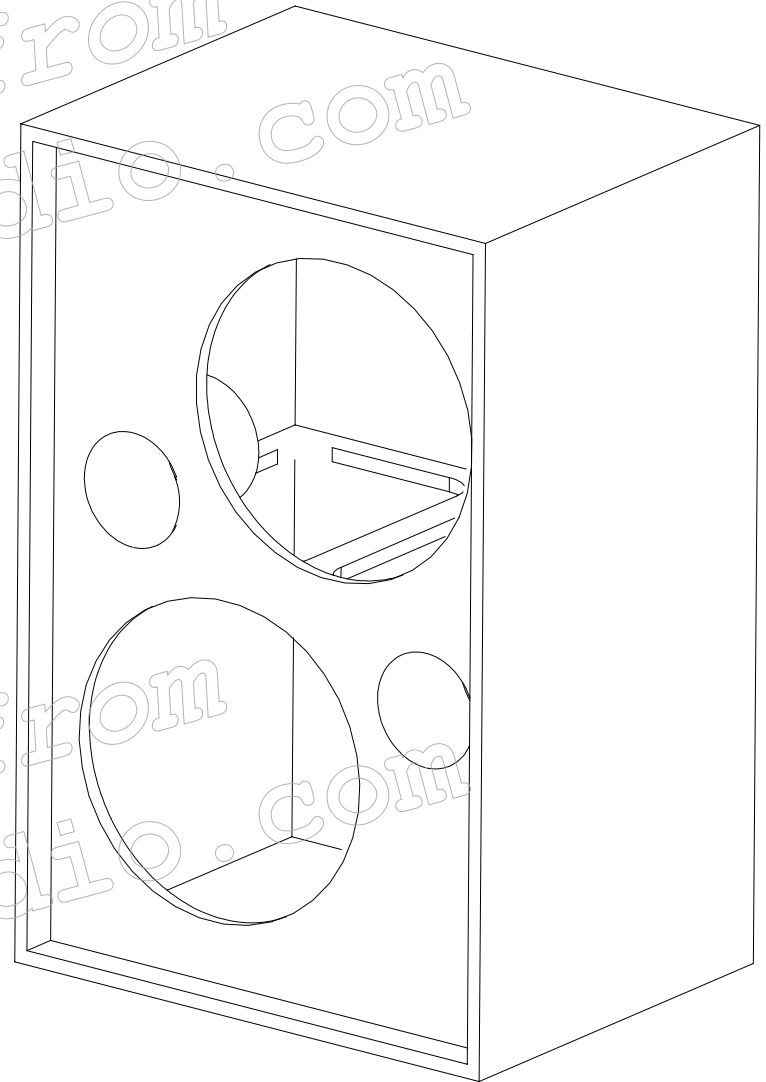
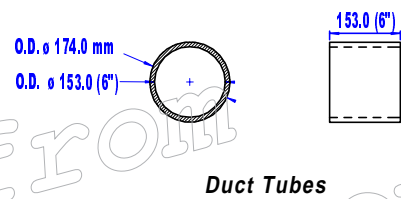
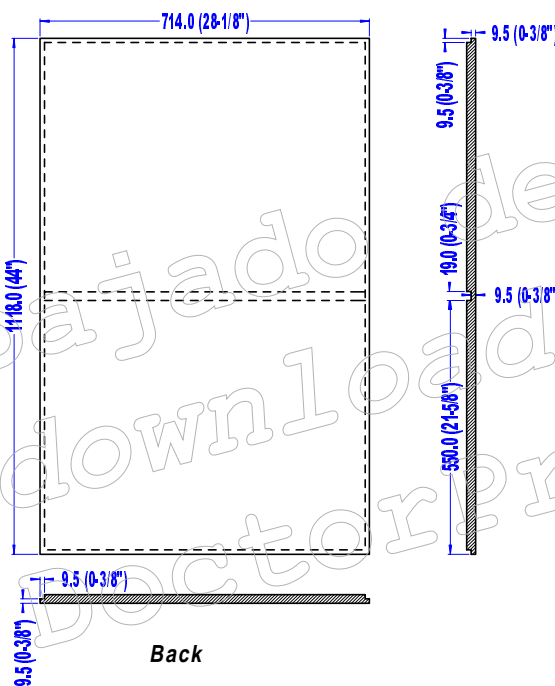
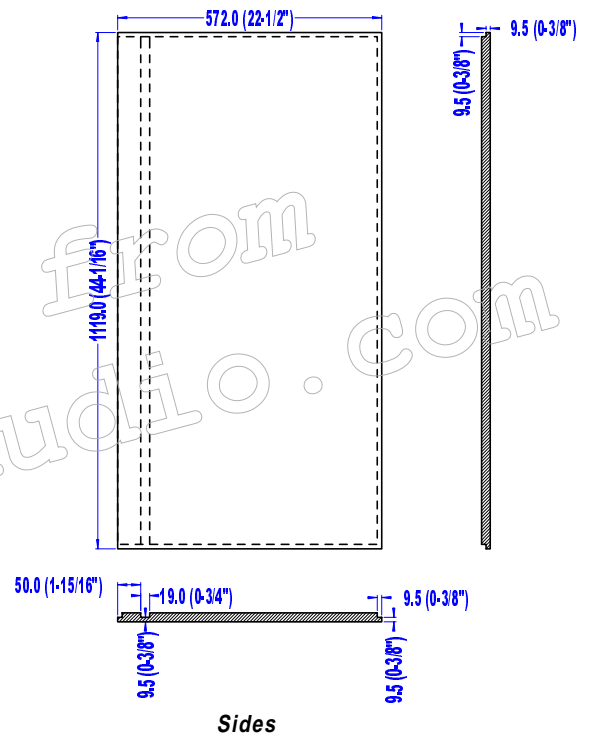
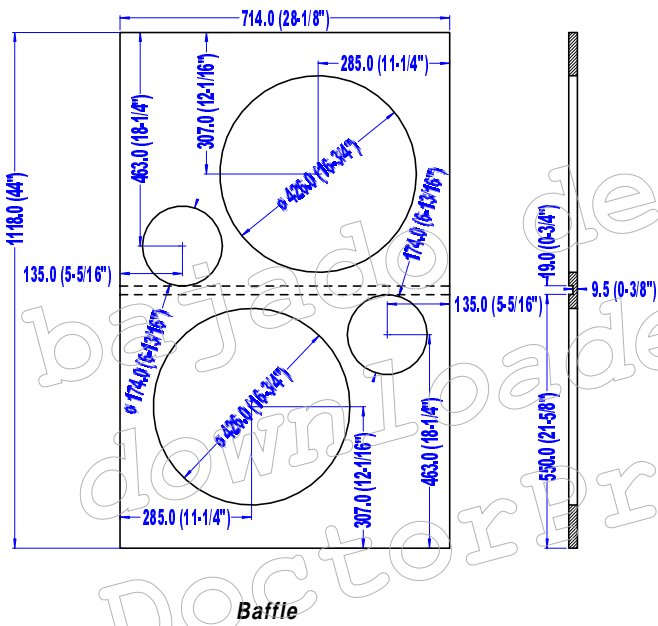


UBSUB Performance Specifications


LF Components	2242H (2)
Sensitivity	102 dB SPL
Power Handling	1600 W LF
Max Peak SPL	140 dB
Frequency Response	30 - 200 Hz

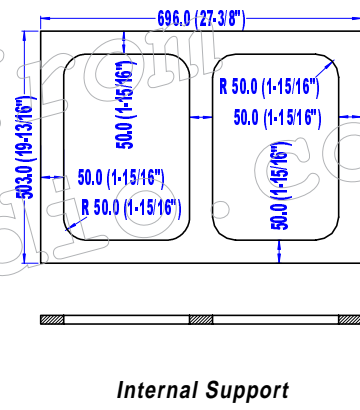


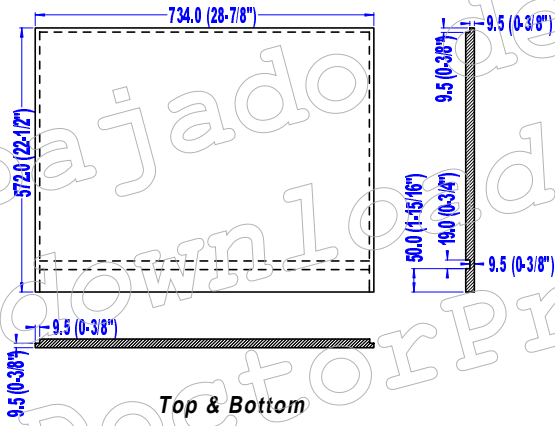


***Note:**
 Dimensions are shown as: mm (inches)
 All dimensions are based on metric measurements.
 Some dimensions may need slight adjustment if
 measured in inches.

Xover Freq:
Subsonic Filter 30 Hz
VLF/LF 80-150 Hz



Outputs to Full Range System
e.g. UB4755 Passive Option 2
or
UB4770 Passive Option 2

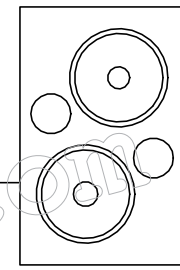


UBSub

Subwoofer Add-on Option 1

Xover Freq:
Subsonic Filter 30 Hz
VLF/LF 80-150 Hz



Outputs to 2-way Full Range System
e.g. UB4755 Passive Option 1
or
UB4770 Passive Option 1

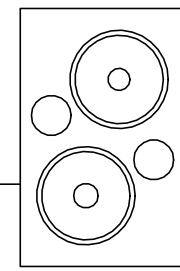


UBSub

Subwoofer Add-on Option 2

Xover Freq:
Subsonic Filter 30 Hz
VLF/LF 80-150 Hz



Outputs to 3-way Full Range System
e.g. UB4755 Active w/ Optional VHF
or
UB4770 Active w/Optional VHF

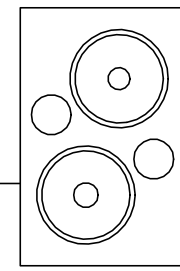

UBSub

Subwoofer Add-on Option 3